


Hook Lift

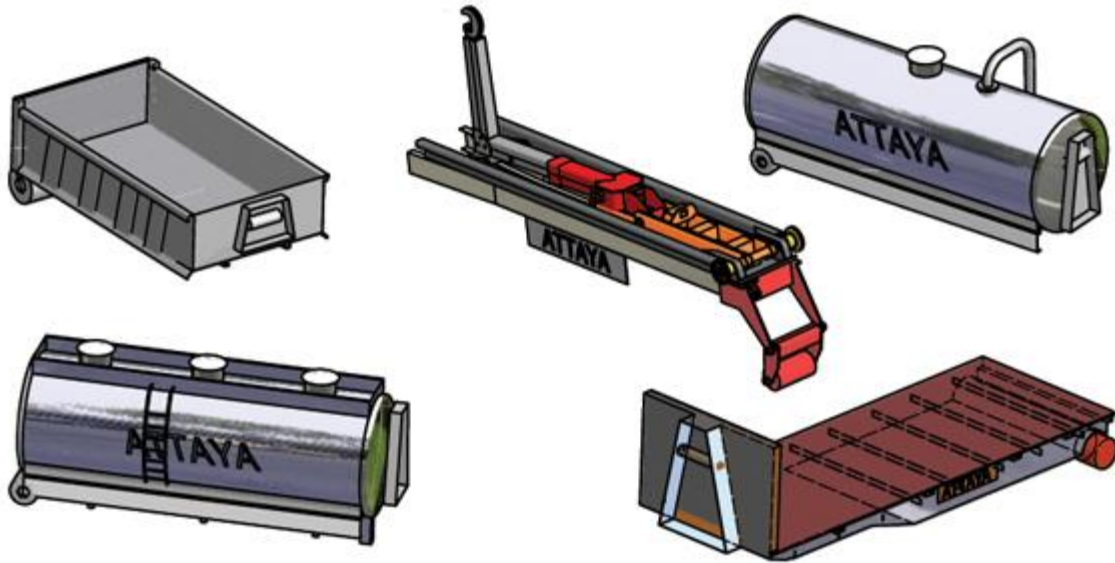

TECHNICAL SPECIFICATIONS

All our equipment are designed and built according to latest worldwide quality standardization. "Quality is our inborn vocation".

All our equipment has integral safety systems built in, so that is virtually impossible to effect and erroneous movement. It's important to note that these system are completely hydraulic.

Our equipment, completely computer-designed, is reliable and long lasting, because we employ high quality steel with the toughness to withstand the heaviest use and extreme climatic conditions.

Pains taking research has established the optimum fulcrum points. Enabling our equipment to lift large loads at relatively low operating pressures.

"A great deal of work with little expenditure of energy".

Our equipment is rapid in movement, since speed is the essence of modern operations, completing the work in the shortest possible time. "We take care of your time for you".

General description :	Roll on – Roll off system + tipping
Capacity :	Net 22 ton .
Container length:	4.5 – 7,0 - Tipping angle 52 degree Max working pressure 350 bar Pump capacity: 80 L/M.
Accessory:	One fire extinguisher bracket mounted on the tank chassis. Reinforcement rear truck bumper will be mounted. Side protection guards for truck fuel tank and battery box. One tool box size 60x60x40 cm mounted on the truck chassis lockable.
Paint:	One layer of primer coat in addition to two layers same truck cabin color.
Electric:	The tank body is equipped with both side warning lights according to traffic regulations.